



PLAN VIEW

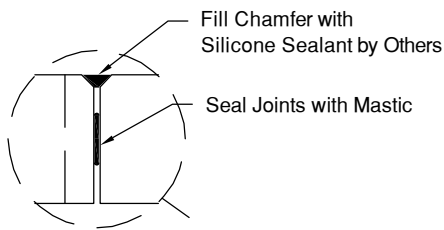

JOINT DETAIL

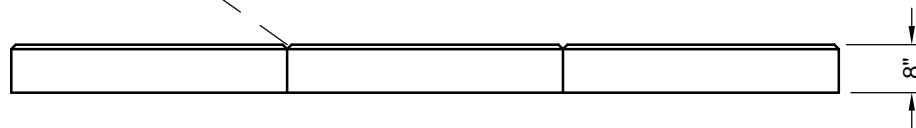

PROFILE VIEW

#4 HANDLES
4 PLACES
EACH SLAB

3/4" Chamfer All Sides

NOTE: ALTERNATE SIZES
AVAILABLE PER JOB
REQUIREMENTS



"NPCA" CERTIFIED PLANT
16700 SIMA GRAY RD, HENRYVILLE, IN 47126
Phone: (812) 246-6258 Fax: (812) 294-4862

SPECIFICATIONS

CONCRETE: 4500 PSI @ 28 DAYS
REINFORCEMENT: ASTM A-615, GR 60
DESIGN LOAD: 17,000# DEAD LOAD
REF: LG&E DWG #42-06-20 REV A

WEIGHT: 4,700# / 6,607# PER SLAB

**TRANSFORMER PAD
ENCLOSURE
TOP SLABS**

DATE: 1-19-17

DWG #EL-TP-LGE-TS