
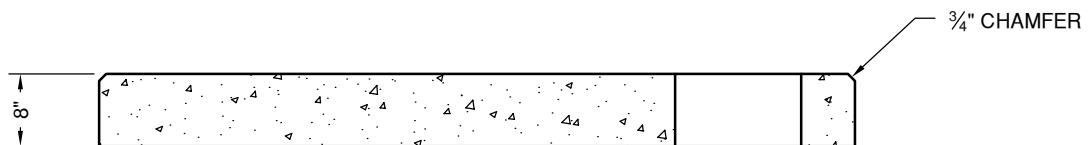


STANDARD TRANSFORMER SIZES

KVA	WIDTH	DEPTH	BLOCKOUT WIDTH	WEIGHT
45 - 150	7'-6"	5'	4'-6"	3,150#
225 - 500	7'-6"	7'	4'-6"	4,650#
750 - 3000	9'	9'	5'	7,433#

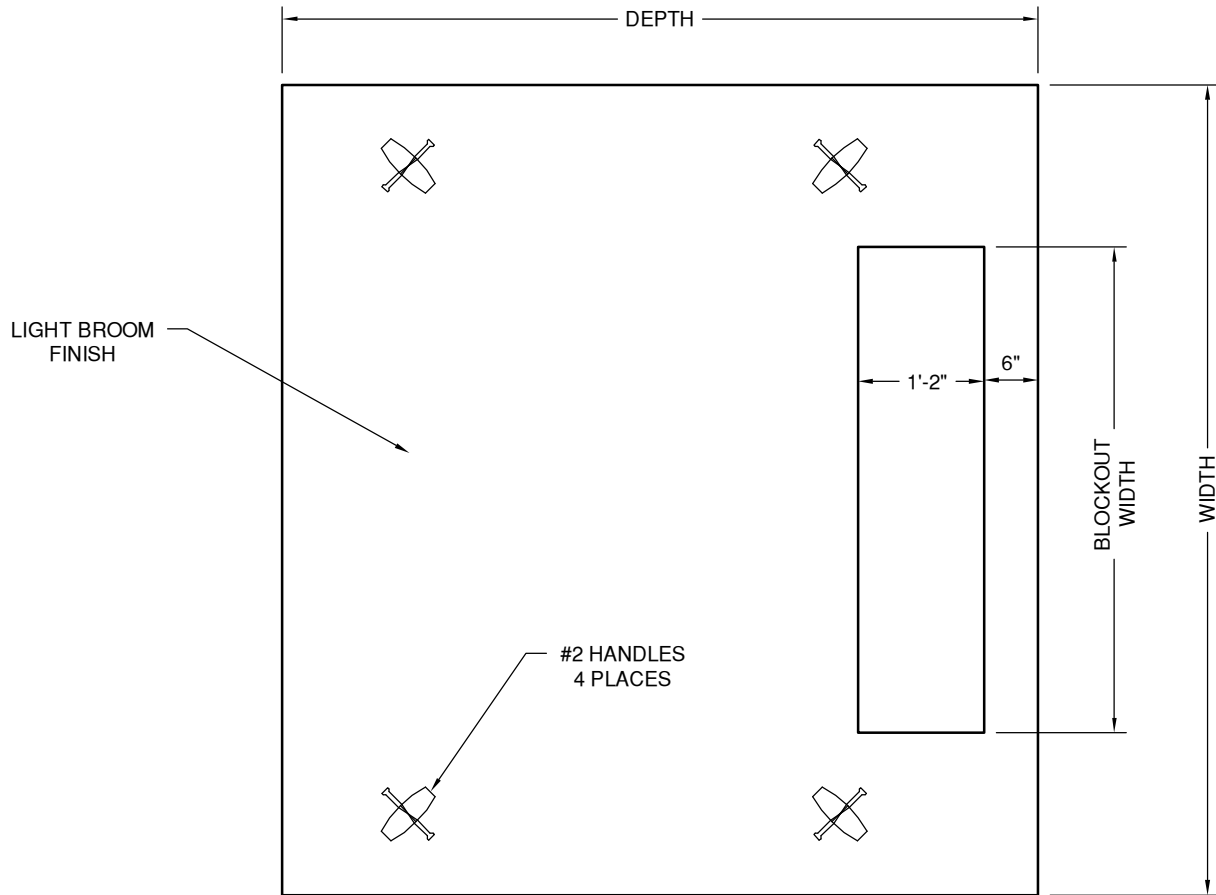

"NPCA" CERTIFIED PLANT
 16700 SIMA GRAY RD, HENRYVILLE, IN 47126
 Phone: (812) 246-6258 Fax: (812) 294-4862

SPECIFICATIONS

CONCRETE: 4500 PSI @ 28 DAYS
 REINFORCEMENT: ASTM A-615, GR 60
 DESIGN LOAD: AASHTO HS-20
 REF: LG&E/KU DWG #A-2-5 REV A => 3PH T-PAD

WEIGHT: See Chart

TRANSFORMER PAD
LG&E / KU
3 PHASE PAD

DATE: 1-18-17

DWG #EL-TP-LGE-KU